


2:1 Elliptical

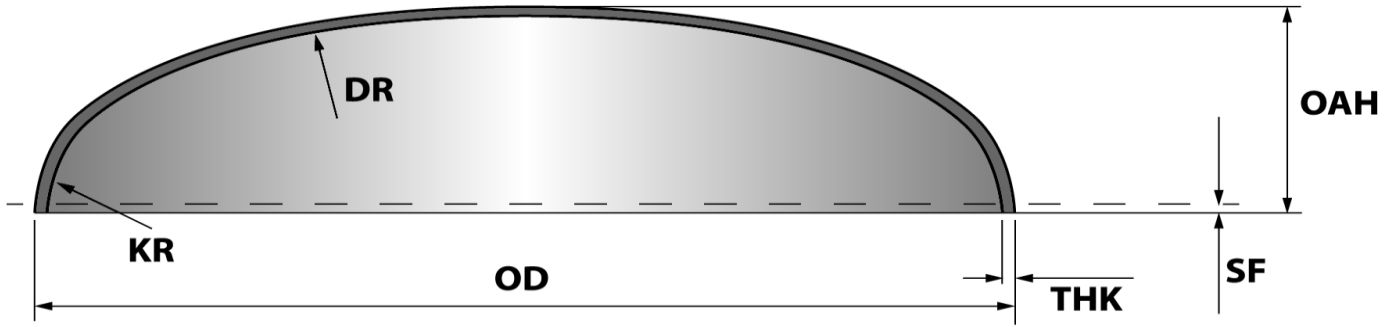

Key: DR-Dish Radius KR-Knuckle Radius OD-Outside Diameter SF-Straight Flange THK-Thickness OAH-Overall Height

SPECIFICATIONS & CAPABILITIES

Stainless Steel 2:1 Elliptical			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
18-23	0.188	0.25	Yes
24-35	0.188	0.3125	Yes
36-59	0.188	0.625	Yes
60-79	0.188	0.75	Yes or No
80-95	0.188	0.875	Yes or No
96-97	0.188	1	Yes or No
98-150	0.25	1	Yes or No

Carbon Steel 2:1 Elliptical			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
18-23	0.188	0.25	Yes
24-35	0.188	0.3125	Yes
36-59	0.188	0.625	Yes
60-63	0.188	0.875	Yes or No
64-97	0.188	1	Yes or No
98-150	0.25	1	Yes or No

**** Center hole option "Yes or No" to be specified by customer**

TOLERANCES

2:1 Elliptical		
Head Dia Inch	Circumference Tolerance	OAH Tolerance *
18-97	+/-0.125	OD x .006
98-144	+/-0.188	OD x .006

*** Minimum OAH Tolerance is .125**

DR: 90% of head diameter
KR: 17.3% of head diameter
SF: 3" maximum

For additional information please contact:

LZR FIT Customer Care

Ph: 715-453-5326