


Flanged Only

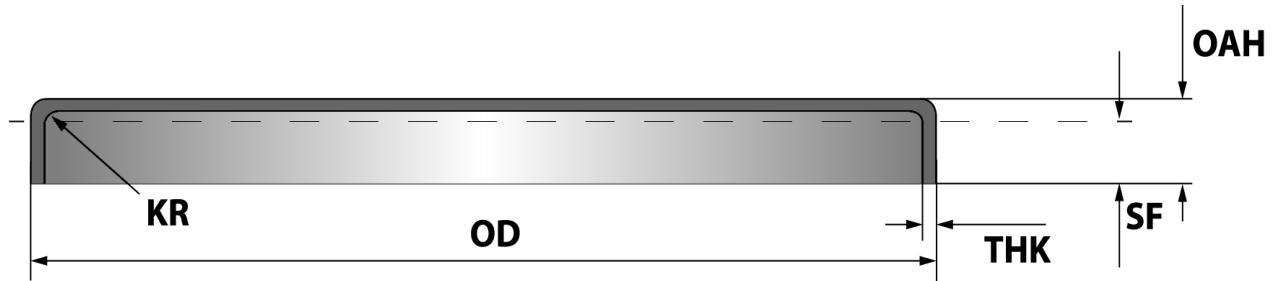

Key: KR-Knuckle Radius OD-Outside Diameter SF-Straight Flange THK-Thickness OAH-Overall Height

SPECIFICATIONS & CAPABILITIES

Stainless Steel Flanged Only *			
Head Dia	Thickness	Thickness	Center
Inch	Min Inch	Max Inch	Hole **
18-22	0.075	0.25	Yes
23-35	0.075	0.3125	Yes
36-61	0.075	0.625	Yes
62-96	0.105	0.625	Yes or No
97-169	0.188	0.625	Yes or No
170-180	0.188	0.625	No

Carbon Steel Flanged Only *			
Head Dia	Thickness Min	Thickness Max	Center
Inch	Inch	Inch	Hole **
18-22	0.075	0.25	Yes
23-35	0.075	0.3125	Yes
36-61	0.075	0.625	Yes
62-96	0.105	0.625	Yes or No
97-169	0.188	0.625	Yes or No
170-180	0.188	0.625	No

* All gage heads will have center hole

** Center hole option "Yes or No" to be specified by customer

TOLERANCES

KR: Made to customer spec

SF: 3" maximum

Flanged Only		
Head Dia	Circumference	OAH
Inch	Tolerance	Tolerance *
18-97	+/-0.125	OD x .006
98-180	+/-0.188	OD x .006

* Minimum OAH Tolerance is .125

For additional information please contact:

LZR FIT Customer Care

Ph: 715-453-5326