


High Crown

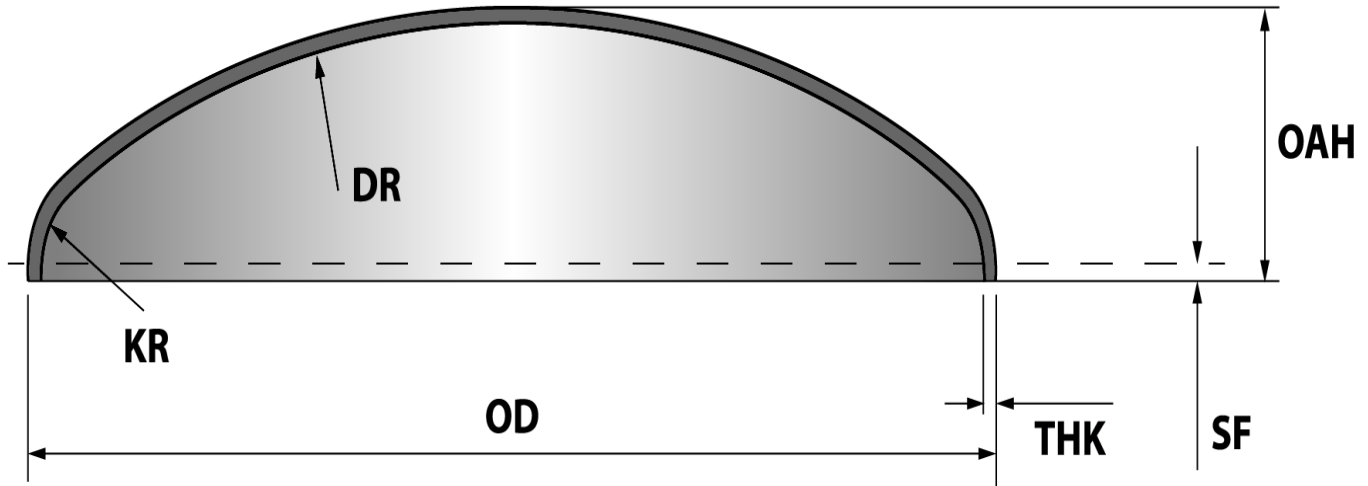

Key: DR-Dish Radius KR-Knuckle Radius OD-Outside Diameter SF-Straight Flange THK-Thickness OAH-Overall Height

SPECIFICATIONS & CAPABILITIES

Stainless Steel High Crown			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
18-22	0.188	0.25	Yes
23-34	0.188	0.3125	Yes
35-58	0.188	0.625	Yes
59-78	0.188	0.875	Yes or No
79-168	0.188	1	Yes or No

Carbon Steel High Crown			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
18-22	0.188	0.25	Yes
23-34	0.188	0.3125	Yes
35-58	0.188	0.625	Yes
59-78	0.188	0.875	Yes or No
79-168	0.188	1	Yes or No

**** Center hole option "Yes or No" to be specified by customer**

TOLERANCES

High Crown		
Head Dia Inch	Circumference Tolerance	OAH Tolerance *
18-97	+/-0.125	OD x .006
98-168	+/-0.188	OD x .006

+ Minimum OAH Tolerance is .125

DR: 80% of head diameter
KR: 6% of head diameter
SF: 3" maximum

*For additional information please contact:
LZR FIT Customer Care
Ph: 715-453-5326*