


Shallow F&D

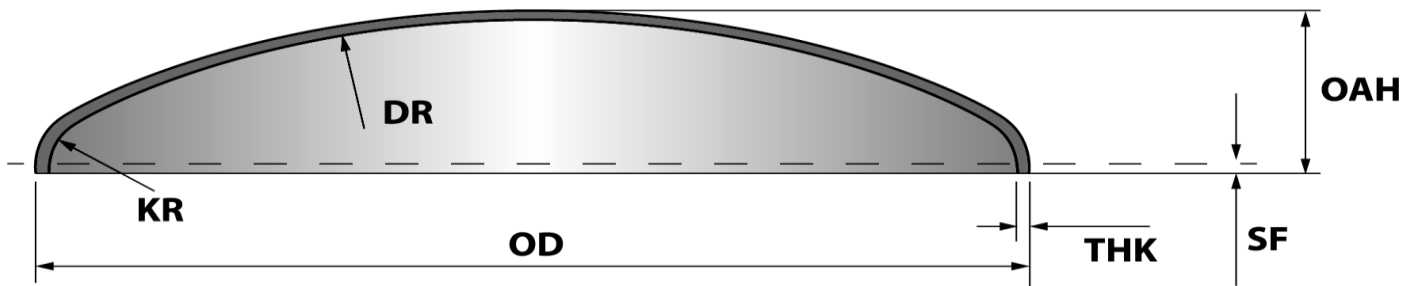

Key: DR-Dish Radius KR-Knuckle Radius OD-Outside Diameter SF-Straight Flange THK-Thickness OAH-Overall Height

SPECIFICATIONS & CAPABILITIES

Stainless Steel Shallow F&D *			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole
14-37	0.075	0.25	Yes
38-49	0.075	0.3125	Yes
50-98	0.075	0.375	Yes
99-117	0.188	0.375	Yes
118-180	0.188	0.75	Yes

Carbon Steel Shallow F&D *			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole
14-37	0.075	0.25	Yes
38-49	0.075	0.3125	Yes
50-98	0.075	0.375	Yes
99-117	0.188	0.375	Yes
118-180	0.188	0.75	Yes

* All gage heads will have center hole

TOLERANCES

Shallow F&D		
Head Dia Inch	Circumference Tolerance	OAH Tolerance *
14-97	+/-0.125	OD x .006
98-180	+/-0.188	OD x .006

* Minimum OAH Tolerance is .125

DR: 150% of head diameter
KR: Typically 3/4" to 4"
SF: 3" maximum

*For additional information please contact:
LZR FIT Customer Care
Ph: 715-453-5326*

