


Standard F&D

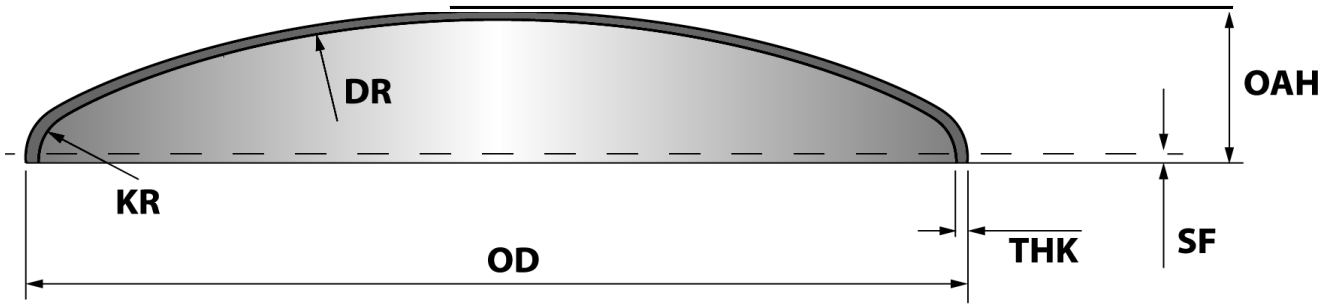

Key: DR-Dish Radius KR-Knuckle Radius OD-Outside Diameter SF-Straight Flange THK-Thickness OAH-Overall Height

SPECIFICATIONS & CAPABILITIES

Stainless Steel Standard F&D *			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
14-29	0.075	0.25	Yes
30-41	0.075	0.3125	Yes
42-61	0.075	0.375	Yes
62-99	0.075	0.375	Yes or No
100-109	0.188	0.375	Yes or No
110-180	0.188	0.75	Yes or No

Carbon Steel Standard F&D *			
Head Dia Inch	Thickness Min Inch	Thickness Max Inch	Center Hole **
14-29	0.075	0.25	Yes
30-41	0.075	0.3125	Yes
42-61	0.075	0.375	Yes
62-99	0.075	0.375	Yes or No
100-109	0.188	0.375	Yes or No
110-180	0.188	0.75	Yes or No

* All gage heads will have center hole

** Center hole option "Yes or No" to be specified by customer

TOLERANCES

Standard F&D		
Head Dia Inch	Circumference Tolerance	OAH Tolerance *
14-97	+/-0.125	OD x .006
98-180	+/-0.188	OD x .006

* Minimum OAH Tolerance is .125

DR: 100% of head diameter

KR: Equals 3/4" to 4" depending on head Dia.

SF: 3" maximum

For additional information please contact:

LZR FIT Customer Care

Ph: 715-453-5326