
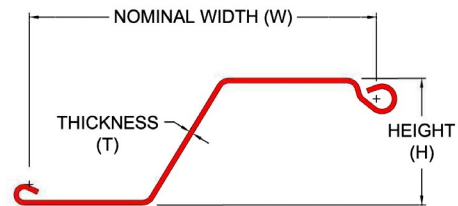


WZ/WEZ SERIES STEEL SHEET PILING

WATERLOO BARRIER

“WZ75” WATERLOO SERIES SHEET PILING


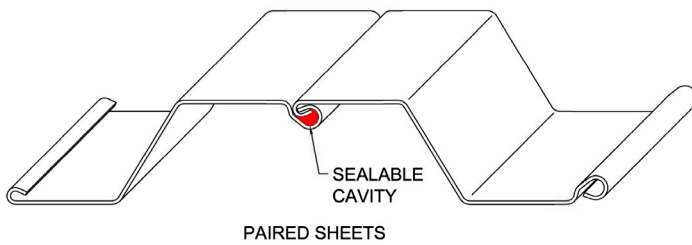


Physical Properties

NOTE: METRIC VALUES IN BRACKETS

Section	Thickness T in (mm)	Height H in (mm)	Nominal Width W in (mm)	Section Area in ² (cm ²)	Weight lbs/lin ft (kg/lin m)	Weight lbs/ft ² (kg/m ²)	Moment of Inertia in ⁴ /wall ft (cm ⁴ /wall m)	Radius of Gyration in (mm)	Section Modulus in ³ /wall ft (cm ³ /wall m)
WZ75	.295 (7.50)	8.72 (221)	24.00 (610)	10.7 (69.0)	36.6 (54.3)	18.3 (89.1)	69.3 (9460)	3.60 (91.4)	15.9 (860)

“WEZ95” WATERLOO SERIES SHEET PILING

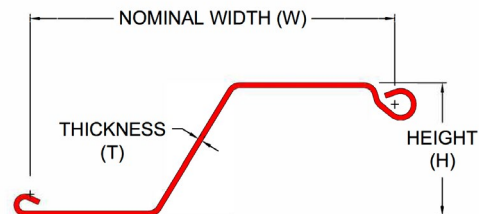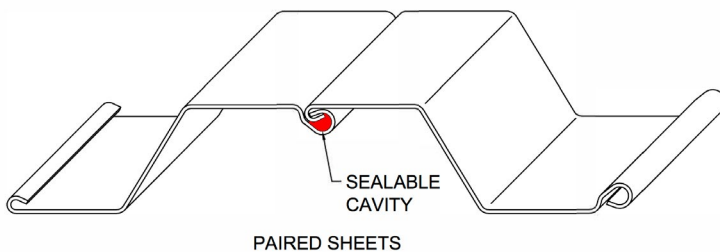

Physical Properties

NOTE: METRIC VALUES IN BRACKETS

Section	Thickness T in (mm)	Height H in (mm)	Nominal Width W in (mm)	Section Area in ² (cm ²)	Weight lbs/lin ft (kg/lin m)	Weight lbs/ft ² (kg/m ²)	Moment of Inertia in ⁴ /wall ft (cm ⁴ /wall m)	Radius of Gyration in (mm)	Section Modulus in ³ /wall ft (cm ³ /wall m)
WEZ95	.375 (9.50)	10.81 (275)	25.00 (635)	14.9 (96.2)	50.5 (75.2)	24.3 (119)	134 (18300)	4.33 (110)	24.9 (1340)

Manufactured and installed in conjunction with our partners from Waterloo-Barrier and C3 Environmental.