


# EZ SERIES STEEL SHEET PILING

ASTM A572 Grade 50 Steel

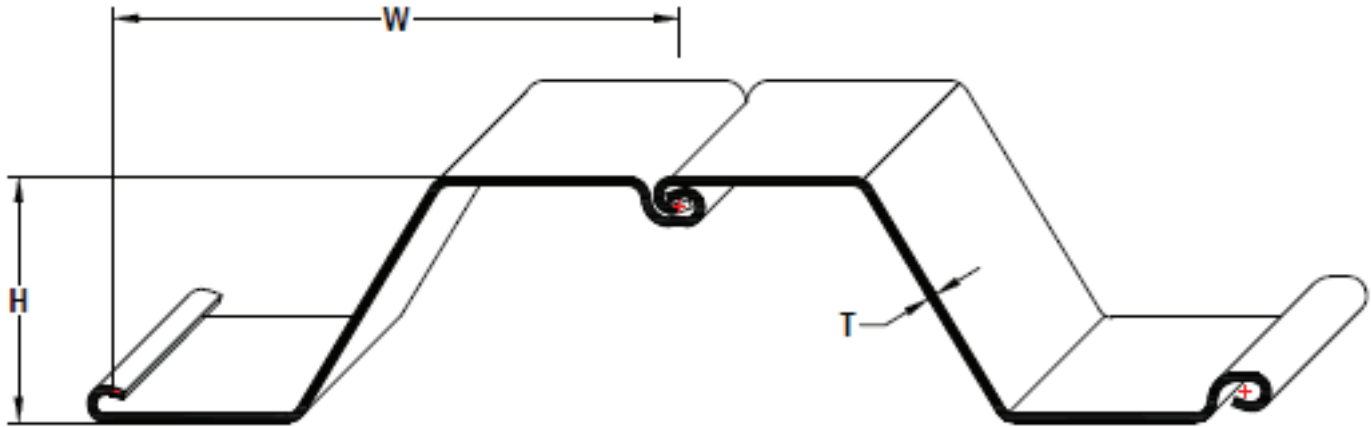

Section	Thickness in (mm)	Height in (mm)	Nominal Width in (mm)	Cross Sectional Area in <sup>2</sup> (cm <sup>2</sup> )	Pile Weight lbs/lin ft. (kg/lin m)	Wall Weight lbs/ft <sup>2</sup> (kg/m <sup>2</sup> )	Moment of Inertia in <sup>4</sup> /wall ft (cm <sup>4</sup> /wall m)	Section Modulus in <sup>3</sup> /wall ft (cm <sup>3</sup> /wall m)	Coating Area Both Sides ft <sup>2</sup> /ft m <sup>2</sup> /m
<b>EZ75</b>	0.295 (7.50)	10.72 (272)	25.0 (635)	11.3 (73.0)	38.5 (57.4)	18.6 (90.4)	103 (14100)	19.2 (1030)	5.60 (1.71)
<b>EZ80</b>	0.315 (8.00)	10.75 (273)	25.0 (635)	12.1 (77.9)	41.1 (61.2)	19.8 (96.4)	110 (15000)	20.5 (1100)	5.60 (1.71)
<b>EZ88</b>	0.344 (8.75)	10.78 (274)	25.0 (635)	13.2 (85.1)	44.9 (66.8)	21.6 (105)	121 (16500)	22.4 (1200)	5.60 (1.71)
<b>EZ95</b>	0.375 (9.50)	10.81 (275)	25.0 (635)	14.4 (92.7)	48.9 (72.8)	23.5 (115)	131 (17900)	24.4 (1310)	5.60 (1.71)